



PONTI SU RUOTE A TORRE / ALLUMINIO

ALUTOWER 140X180

+ COMPONENTI ACCESSORIES



BASE M 2,20

Base

140x180

CODE 50061 / €

Kg 56 - Mc 0,33



ALZATA TORRE M 1,80

Tower m 1,80

140x180

CODE 50062 / €

Kg 26 - Mc 0,28



OPTIONAL *Optional*

ALZATA TOP M 0,80

Tower m 0,80

140x180

CODE 50063 / €

Kg 17 - Mc 0,20




**PIANO LAVORO RESINATO
CON STRUTTURA IN
ALLUMINIO** *Platform*

140x180

CODE 50064 / €

Kg 21 - Mc 0,10



PARAPETTO

Guardrail

140x180

CODE 50053 / € Kg 9 - Mc

0,10




**4 STAFFE STABILIZZATRICI
EN1004 CON GIUNTI**

4 EN1004 stabilizers with locks

CODE 50054 / €

Kg 16 - Mc 0,5



RUOTA TELESCOPICA CM 35

Telescopic wheel cm 35

CODE 20824 / €

Kg 6 - Mc 0,01




DIMENSIONI TORRE

Tower dimensions

m 1,40 x 1,80

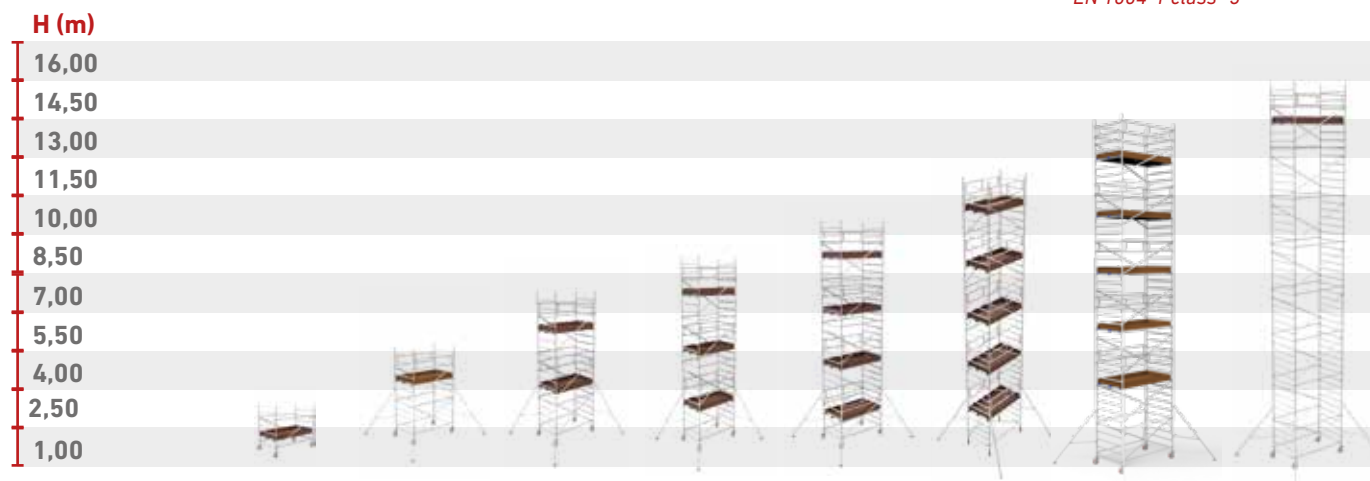

**CARICO COMPLESSIVO CONSENTITO***Total load permitted***Kg 367****COMPATIBILE CON***Interchangeable with***87x180**D.Lgs.
81/2008
ART.140**EN 1004-1 CLASSE "3"***EN 1004-1 class "3"*

CODE 			AW.DL.140.180.02	AW.DL.140.180.03	AW.DL.140.180.04	AW.DL.140.180.05	AW.DL.140.180.06	AW.DL.140.180.07
D.Lgs. 81/08	€							
CODE  		AW.EN.140.180.00	AW.EN.140.180.01	AW.EN.140.180.02	AW.EN.140.180.03	AW.EN.140.180.04	AW.EN.140.180.05	AW.EN.140.180.06
EN 1004-1:2021	€							

H max ponteggio H max mobile tower	m	2,20	4,00	5,80	7,60	9,40	11,20	13,00	14,80
H max piano di lavoro H max work platform	m	1,10	2,60	4,40	6,20	8,00	9,80	11,60	13,40
50061 Base Base	n.	1	1	1	1	1	1	1	1
50062 Alzata torre Tower / m 1,80	n.	0	1	2	3	4	5	6	7
50054 4 staffe 4 stabilizer	n.	0	1	1	1	1	1	1	1

D.LGS. 81/08 con ancoraggio with anchorage DL 81/2008									
50064 Piani di lavoro Work Platform	n.			1	1	1	1	1	1
50053 Parapetto Guardrail	n.			1	1	1	1	1	1
Peso / Mc Weight / Mc	kg/mc			139 / 1,20	200 / 1,50	210 / 1,80	280 / 1,90	300 / 2,01	330 / 2,3
EN 1004-1		senza ancoraggio without anchorage EN 1004-1-2021							
50064 Piani lavoro Work platform	n.	1	1	2	3	4	5	5	
50053 Parapetto Guardrail	n.	1	1	2	3	4	5	5	
Peso / Mc Weight	kg/mc	101/1,74	144/1,80	169/2,00	241/2,20	266/2,40	338/2,60	364/2,80	

